



# ANLY TIMER

## APT-8S WEEKLY PROGRAMMABLE TIMER



### CHARACTERISTIC :

- Weekly programmable timer
- 8 different timing settings per day
- 15 different weekly combinations (See chart below)
- Built-in Lithium battery prevent power outage up to one year
- Crystal oscillator for extreme accuracy
- Up to 99 days holiday suspension
- Built-in Lithium battery prevent power outage up to one year
- Daylight-saving-time function
- Backlit LCD for easy viewing
- UL, C-UL recognized and CE certified

### SPECIFICATION :

Operating voltage	AC/DC(V): 12~48 AC/DC(V): 100~240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	240VAC 7A(N.O.) resistive load 240VAC 5A(N.C.) resistive load
Indicator operating	ON - Green, OFF - Red
Power consumption	Approx. 3.3VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C (without condensation & freezing)
Ambient humidity	MAX 85% RH (without condensation)
Altitude	MAX 2000m
Weight	Approx. 170g

### 15 weekly combinations chart :


	SUN	MON	TUE	WED	THU	FRI	SAT
1		⊙					
2			⊙				
3				⊙			
4					⊙		
5						⊙	
6							⊙
7	⊙						
8		⊙	⊙	⊙	⊙	⊙	

	SUN	MON	TUE	WED	THU	FRI	SAT
9		⊙	⊙	⊙	⊙	⊙	⊙
10	⊙						⊙
11	⊙	⊙	⊙	⊙	⊙	⊙	⊙
12		⊙	⊙	⊙			
13					⊙	⊙	⊙
14		⊙		⊙		⊙	
15			⊙		⊙		⊙


## CONNECTION :

When a time switch and load power supply are separate

N type(Surface Mounting)

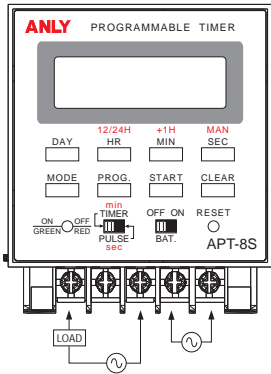


Y type(Flush Mounting)




When a time switch and load power supply are the same

N type(Surface Mounting)

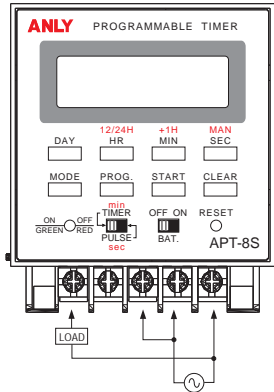


Y type(Flush Mounting)

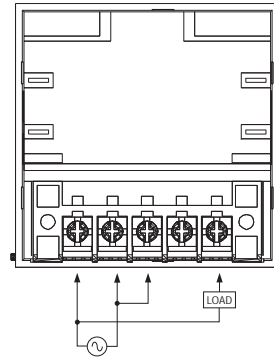


## DIMENSIONS : (mm)

N type(Surface Mounting):

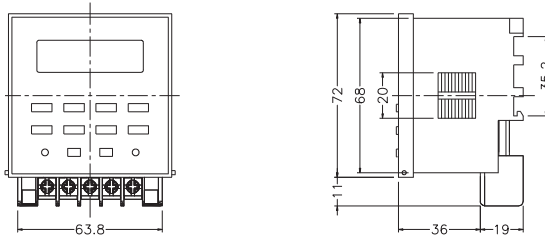

Y type(Flush Mounting): Using Y70 Adapter

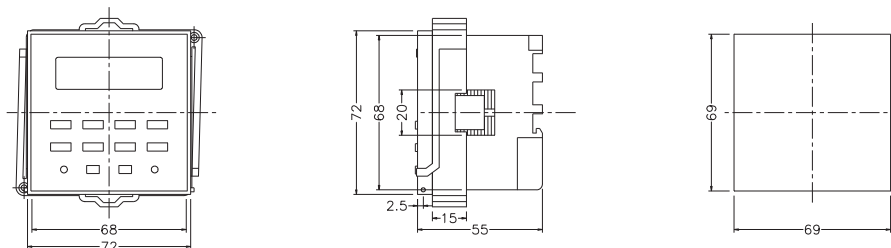

Tolerance:  $\pm 0.1$

**ANLY ELECTRONICS CO., LTD.**

<http://www.anly.com.tw>

**TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.**

No.19, Lane 202, Fushou St., Xinzhuang Dist., New Taipei City 242, Taiwan  
TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

**HONG KONG OFFICE : ANLY ELECTRONICS (HK) LTD.**

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong  
TEL: +852-2397-2505 FAX: +852-2397-6080

**CHINA OFFICE : ANLY TECHNOLOGY (WUXI) CO., LTD.**

2F, Building A, Plot 1, No. 28, Zhanhong Rd., Xinwu Dist., Wuxi, Jiangsu, P.R.China  
TEL: +86-510-85304801-3

**MALAYSIA OFFICE : JUSTY ELECTRONICS (M) SDN. BHD.**

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia  
TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

**INDONESIA OFFICE : PT. ANLY ELECTRONICS INDONESIA**

Jl. Pangeran Jayakarta 117/B9, Jakarta Pusat, 10730 Indonesia  
TEL: +62-21-624-8436 FAX: +62-21-626-1228

NO. APT8-W-A